


# Recycling unsealed roads to reduce dust & maintenance using insitu stabilisation

This is a joint Federal Government, industry and Jerilderie Shire Council research project. The aims of the project are to:

- substantially reduce dust generation from unsealed roads
- reduce maintenance frequency and hence maintenance costs to Shires
- provide safe all weather access on unsealed roads
- incrementally improve the structural strength of the road

## Project Details

Site	Four Corners Road, Jerilderie
Construction date	3 July 2008
Council	Jerilderie Shire Council - Contact: Mr David Tamlyn
Accredited Stabilisation Contractor	Stabilised Pavements of Australia Pty Ltd Contact: Andrew Middleton ☎02 4340 0111
Binders	3% of cement/slag (70:30) blend
Binders supplied by	Cxxxxx
Stabilisation depth	150 mm
Stabilisation width	5 m

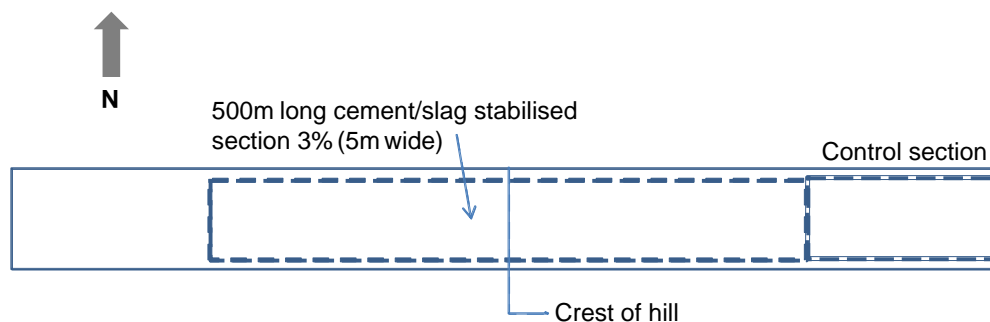

## Unsealed roads – Cement stabilisation trial at Four Corners Road, Jerilderie

For more information about this research project please refer to [www.auststab.com.au](http://www.auststab.com.au) and click on **Research** or write to the Australian Stabilisation Industry Association (AustStab)  
5/38 Railway Parade, Burwood NSW 2134